



VE Series

Features

- 3φ ~ 18φ, 85°C, 2,000 hours assured
- Chip type large capacitance capacitors
- Designed for surface mounting on high density PC board
- RoHS Compliance

NSCN® | WWW.NSCN.COM.CN

总机: 025-52188228 客服: 400-888-5058

技术: 025-84712971 邮箱: TECH@NSCN.COM.CN

南京南山半导体有限公司



Marking color: Black

Specifications

Items	Performance																																																														
Category Temperature Range	-40°C ~ +85°C																																																														
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																																														
Leakage Current (at 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td colspan="2">6.3 ~ 100V</td> <td>160 ~ 450V</td> </tr> <tr> <td>Time</td> <td colspan="2">after 2 minutes</td> <td>after 5 minutes</td> </tr> <tr> <td>Case size</td> <td>3 ~ 10φ</td> <td>12.5 ~ 18φ</td> <td>12.5 ~ 18φ</td> </tr> <tr> <td>Leakage Current</td> <td>I = 0.01CV or 3μA, whichever is greater</td> <td>I = 0.03CV or 4μA, whichever is greater</td> <td>I = 0.04CV + 100μA</td> </tr> </table> <p>Where, C = rated capacitance in μF V = rated DC working voltage in V</p>	Rated Voltage	6.3 ~ 100V		160 ~ 450V	Time	after 2 minutes		after 5 minutes	Case size	3 ~ 10φ	12.5 ~ 18φ	12.5 ~ 18φ	Leakage Current	I = 0.01CV or 3μA, whichever is greater	I = 0.03CV or 4μA, whichever is greater	I = 0.04CV + 100μA																																														
	Rated Voltage	6.3 ~ 100V		160 ~ 450V																																																											
	Time	after 2 minutes		after 5 minutes																																																											
	Case size	3 ~ 10φ	12.5 ~ 18φ	12.5 ~ 18φ																																																											
Leakage Current	I = 0.01CV or 3μA, whichever is greater	I = 0.03CV or 4μA, whichever is greater	I = 0.04CV + 100μA																																																												
Dissipation Factor (Tanδ at 120Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160 ~ 250</td> <td>400 ~ 450</td> </tr> <tr> <td>3 ~ 10φ</td> <td>0.42</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.10</td> <td>-</td> <td>-</td> </tr> <tr> <td>12.5 ~ 18φ</td> <td>-</td> <td>0.38</td> <td>0.34</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.14</td> <td>0.10</td> <td>0.20</td> <td>0.25</td> </tr> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.</p>	Rated Voltage	4	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450	3 ~ 10φ	0.42	0.28	0.24	0.20	0.14	0.12	0.10	0.10	0.10	-	-	12.5 ~ 18φ	-	0.38	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.20	0.25																										
	Rated Voltage	4	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450																																																			
3 ~ 10φ	0.42	0.28	0.24	0.20	0.14	0.12	0.10	0.10	0.10	-	-																																																				
12.5 ~ 18φ	-	0.38	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.20	0.25																																																				
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td colspan="2">Rated Voltage</td> <td>4.0</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160 ~ 250</td> <td>400 ~ 450</td> </tr> <tr> <td rowspan="4">Impedance Ratio</td> <td>Z(-25°C)</td> <td>φD < 12.5</td> <td>7</td> <td>4</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>-</td> <td>-</td> </tr> <tr> <td>/Z(+20°C)</td> <td>φD ≥ 12.5</td> <td>-</td> <td>5</td> <td>5</td> <td>4</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> </tr> <tr> <td>Z(-40°C)</td> <td>φD < 12.5</td> <td>15</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>-</td> <td>-</td> </tr> <tr> <td>/Z(+20°C)</td> <td>φD ≥ 12.5</td> <td>-</td> <td>14</td> <td>12</td> <td>10</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>6</td> <td>10</td> </tr> </table>	Rated Voltage		4.0	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450	Impedance Ratio	Z(-25°C)	φD < 12.5	7	4	4	3	2	2	2	2	-	-	/Z(+20°C)	φD ≥ 12.5	-	5	5	4	2	2	2	2	3	6	Z(-40°C)	φD < 12.5	15	8	5	4	3	3	3	3	-	-	/Z(+20°C)	φD ≥ 12.5	-	14	12	10	5	4	3	3	6	10
	Rated Voltage		4.0	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450																																																		
	Impedance Ratio	Z(-25°C)	φD < 12.5	7	4	4	3	2	2	2	2	-	-																																																		
		/Z(+20°C)	φD ≥ 12.5	-	5	5	4	2	2	2	2	3	6																																																		
Z(-40°C)		φD < 12.5	15	8	5	4	3	3	3	3	-	-																																																			
/Z(+20°C)		φD ≥ 12.5	-	14	12	10	5	4	3	3	6	10																																																			
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value (4V: ±30%)</td> </tr> <tr> <td>Dissipation Factor</td> <td>Less than 200% of specified value (4V: ±300%)</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C.</p>	Test Time	2,000 Hrs	Capacitance Change	Within ±20% of initial value (4V: ±30%)	Dissipation Factor	Less than 200% of specified value (4V: ±300%)	Leakage Current	Within specified value																																																						
	Test Time	2,000 Hrs																																																													
	Capacitance Change	Within ±20% of initial value (4V: ±30%)																																																													
	Dissipation Factor	Less than 200% of specified value (4V: ±300%)																																																													
Leakage Current	Within specified value																																																														
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1).																																																														
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td rowspan="3">Cap. (μF)</td> <td>Freq. (Hz)</td> <td>50</td> <td>120</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Under 1,000</td> <td>0.80</td> <td>1.00</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <td>1,000 < C ≤ 6,800</td> <td>0.85</td> <td>1.00</td> <td>1.15</td> <td>1.25</td> </tr> </table>	Cap. (μF)	Freq. (Hz)	50	120	1k	10k up	Under 1,000	0.80	1.00	1.25	1.40	1,000 < C ≤ 6,800	0.85	1.00	1.15	1.25																																														
Cap. (μF)	Freq. (Hz)		50	120	1k	10k up																																																									
	Under 1,000		0.80	1.00	1.25	1.40																																																									
	1,000 < C ≤ 6,800	0.85	1.00	1.15	1.25																																																										

Diagram of Dimensions

Fig. 1


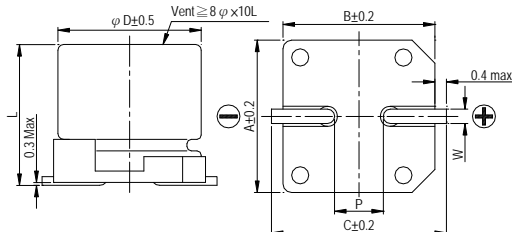


Fig. 2

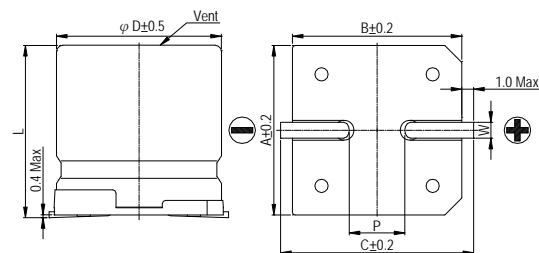


Lead Spacing and Diameter

Unit: mm


φD	L	A	B	C	W	P ± 0.2	Fig. No.
3	5.3 ± 0.2	3.3	3.3	4.1	0.45 ~ 0.75	0.8	1
4	5.3 ± 0.2	4.3	4.3	5.1	0.5 ~ 0.8	1.0	1
5	5.3 ± 0.2	5.3	5.3	5.9	0.5 ~ 0.8	1.5	1
6.3	5.3 ± 0.2	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	10 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1	1
8	10.3 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1	1
10	7.7 ± 0.3	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
10	10 ± 0.5	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
10	10.3 ± 0.5	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
12.5	13.5 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
12.5	16 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	16.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
16	21.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
18	16.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	21.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2

Marking


φ D = 3 mm

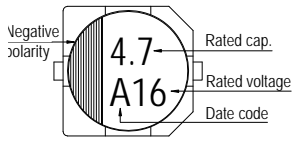


φ D = 4 ~ 6.3mm

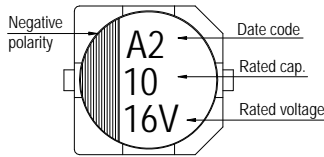

φ D = 8 ~ 10 mm

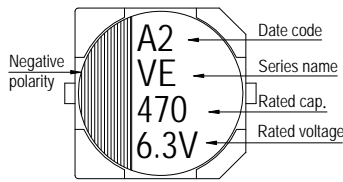

φ D ≥ 12.5mm

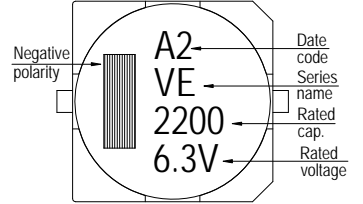

Dimension & Permissible Ripple Current

Dimension: φ D × L(mm)

Ripple Current: mA/rms at 120 Hz, 85°C

μF	V. DC Contents	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63 (1J)	
		φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
1	010																
2.2	2R2													4×5.3	10	4×5.3	8
3.3	3R3													4×5.3	14	4×5.3	12
4.7	4R7													4×5.3	17	5×5.3	22
10	100			3×5.3	16	4×5.3	26	4×5.3	26	5×5.3	44	5×5.3	44	5×5.3	35	6.3×5.3	40
22	220	3×5.3	16	4×5.3	26	5×5.3	44	4×5.3	30	5×5.3	47	5×5.3	47	6.3×5.3	50	8×10	139
33	330	4×5.3	31	4×5.3	31	4×5.3	31	5×5.3	55	5×5.3	55	6.3×5.3	67	6.3×7.7	75	8×10	139
47	470	4×5.3	34	4×5.3	34	6.3×5.3	75	5×5.3	55	6.3×5.3	75	6.3×7.7	98	6.3×7.7	75	10×10	200
68	680	5×5.3	58	5×5.3	58	6.3×5.3	89	6.3×5.3	89	6.3×7.7	109	6.3×7.7	109	8×10	190	10×10	226
100	101	5×5.3	58	6.3×5.3	89	6.3×5.3	89	6.3×5.3	89	6.3×7.7	109	6.3×7.7	109	8×10	190	10×10	226
150	151												10×7.7	252			
220	221	6.3×5.3	89	6.3×5.3	89	6.3×7.7	124	6.3×7.7	124	8×10	270	8×10	270	10×10	320	12.5×13.5	500
330	331	6.3×7.7	124	6.3×7.7	124	8×10	270	8×10	270	10×7.7	270	10×10	370				
470	471	6.3×7.7	124	6.3×7.7	124	8×10	290	8×10	290	10×10	400	10×10.3	400	12.5×13.5	600	12.5×16	600
680	681			10×7.7	290	10×10	410	10×10	410	10×10	400	12.5×13.5	750	12.5×16	740	16×16.5	850
1,000	102			10×7.7	290	10×10	410	10×10	410	12.5×13.5	680	12.5×13.5	680	16×16.5	1,000	18×16.5	1,100
2,200	222			10×10	430	10×10	430	12.5×13.5	750	12.5×13.5	750	16×16.5	1,100	18×16.5	1,350		
3,300	332			12.5×13.5	890	12.5×13.5	890	16×16.5	1,100	16×16.5	1,100	18×16.5	1,450	16×21.5	1,400		
4,700	472			12.5×13.5	890	12.5×13.5	890	16×16.5	1,100	16×16.5	1,100	18×16.5	1,450	16×21.5	1,400		
6,800	682			12.5×16	1,000	16×16.5	1,300	16×16.5	1,300	18×16.5	1,450	18×21.5	1,750				
10,000	103			16×16.5	1,400	16×16.5	1,400	18×16.5	1,600	16×21.5	1,650	18×21.5	1,750				
				18×16.5	1,700	18×16.5	1,700	18×21.5	2,000								
				16×21.5	1,750	16×21.5	1,750										
				18×21.5	2,000	18×21.5	2,000										

μF	V. DC Contents	100V (2A)		160V (2C)		200V (2D)		250V (2E)		400V (2G)		450V (2W)	
		φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
4.7	4R7									12.5×13.5	120	12.5×13.5	120
10	100	8×10	90					12.5×13.5	150	12.5×13.5	120	12.5×16	130
22	220	8×10	90			12.5×13.5	240	12.5×13.5	150	16×16.5	140	16×16.5	140
33	330	10×10	120	12.5×13.5	290	12.5×16	310	12.5×16	240	16×16.5	140	18×16.5	180
47	470	10×10	120	12.5×16	370	16×16.5	420	16×16.5	340	18×16.5	280	18×21.5	250
68	680	12.5×13.5	380	16×16.5	500	16×16.5	420	18×16.5	440	18×21.5	350		
100	101	12.5×13.5	440	18×16.5	650	18×16.5	550	18×21.5	490				
				16×21.5	690	16×21.5	590						
220	221	16×16.5	600										
330	331	18×16.5	780										
		16×21.5	850										

NSCN® | WWW.NSCN.COM.CN
 总机: 025-52188228 客服: 400-888-5058
 技术: 025-84712971 邮箱: TECH@NSCN.COM.CN
 南京南山半导体有限公司