

DATA SHEET

PART NO. : 19-21/GHC-R1S1/3T

DATE : 2003/1/6

DEPARTMENT : R.D.1

REVISION : 1.0

RECEIVED			
<input checked="" type="checkbox"/> MASS PRODUCTION			
<input type="checkbox"/> PRELIMINARY			
<input type="checkbox"/> CUSTOMER DESIGN			
DEVICE NUMBER : DSE-191-G01			
PAGE : 12			
CUSTOMER	DESIGNER	CHECKER	APPROVER
	Jessica Chang	Jeff Tsai	Charles Chang

-	DESCRIPTION	RELEASE DATE

Package Type:

SMD For PCB Type

11-21	19-215
12-21	19-215A
12-215	19-217A
15-21	22-21
15-215	23-21
16-213	23-21B
17-21	24-21
17-215	25-21
19-21	27-21
19-21A	42-21

Dominant Wavelength Groups:

According to the difference wavelength to define

None: No definition

- A : Standard wavelength definition.
- B : Range of wavelength definition is more narrowly than group A.
- C : Range of wavelength definition is more narrowly than group A, but the value is different with group B.
- F : The wavelength definition in special specification.

The dominant wavelength data did not including ±1nm testing tolerance.

Test Forward Current:

- None: 20 mA
- Y : 5 mA
- Z : 10 mA

Taping Quantity:

- 1: 1000 pcs (Taping)
- 2: 2000 pcs (Taping)
- 3: 3000 pcs (Taping)
- 5: 5000 pcs (Taping)
- C : 1500 pcs (Taping)
- D : 10000 pcs (Taping)

Packing Method :

- A: Reverse-side placement
- B: Reverse-side placement (Anode toward the sprocket hole)
- C: Right-side placement
- D: Right-side placement (Anode toward the sprocket hole)
- T: Top-side placement
- R: Top-side placement (Anode toward the sprocket hole)

3 T

Emission Color:

R: Red

(λ d:640nm,630nm,625nm)

S: Sunset Orange

(λ d:615nm,605nm)

Y: Yellow

(λ d:595nm,590nm)

G: Green

(λ d:570nm,565nm,560nm,525nm,505nm)

B: Blue

(λ d:470nm)

W: White x=0.32
y=0.31

The ordinal number that base on difference electro-optical characteristics within chip.

1,2 7,8,9,
A,B X,Y,Z

Resin Color:

- C: Water Clear
- W: White Diffused
- D: Diffused

Luminous Intensity Groups:

- C0: 0.28 ... 0.45
- D0: 0.45 ... 0.70
- E0: 0.70 ... 1.1
- F0: 1.1 ... 1.8
- G0: 1.8 ... 2.8
- H0: 2.8 ... 4.5
- J0: 4.5 ... 7.2
- K0: 7.2 ... 11.5
- L1: 11.5 ... 14.5
- L2: 14.5 ... 18.0
- M1: 18.0 ... 22.5
- M2: 22.5 ... 28.5
- N1: 28.5 ... 36.0
- N2: 36.0 ... 45.0
- P1: 45.0 ... 57.0
- P2: 57.0 ... 72.0
- Q1: 72.0 ... 90.0
- Q2: 90.0 ... 112

- R ⇨ R1: 112 ... 140
- R2: 140 ... 180
- S ⇨ S1: 180 ... 225
- S2: 225 ... 285
- T ⇨ T1: 285 ... 360
- T2: 360 ... 450
- U ⇨ U1: 450 ... 565
- U2: 565 ... 715
- V ⇨ V1: 715 ... 900
- V2: 900 ... 1120
- W ⇨ W1: 1120 ... 1420
- W2: 1420 ... 1800
- X ⇨ X1: 1800 ... 2250
- X2: 2250 ... 2850
- Y ⇨ Y1: 2850 ... 3600
- Y2: 3600 ... 4500

Unit: mcd

www.nscn.com.cn

The luminous intensity data did not including ±15% testing tolerance.

Forward Voltage Groups:

None: No definition

The VF definition as follows:

Forward Voltage Group	Bin	Unit: V		
		Min.	Max.	
C	00	1.55	1.75	
	A	0	1.75	1.95
	B	1	1.95	2.15
	1	2	2.15	2.35
	2	3	2.35	2.55
M	3	2.35	2.55	
	4	2.55	2.75	
	5	2.75	3.05	
	6	3.05	3.35	
E	7	3.35	3.65	
	8	3.65	3.95	
	9	2.50	2.70	
R	10	2.70	2.90	
	11	2.90	3.10	
J	12	3.10	3.30	
	13	3.30	3.50	
N	14	3.50	3.70	
	15	2.70	2.85	
F	16	2.85	3.00	
	17	3.00	3.15	
K	18	3.15	3.30	
	P			
H				

The forward voltage data did not including ±0.1V testing tolerance.

文件編號 Doc. No.	SOP-3-143-D1	版別 Rev.	4.2	頁數 Page	11/21
------------------	--------------	------------	-----	------------	-------

第二代SMD---PQC&FQA分色規格(PQC&FQA λd SPEC.) :

Chip	G2				
Dom . Wavelength		Range			
Of Group		Bin	Min.	Max.	Unit
A		C9	555	558	nm
		C10	557	560	nm
		C11	559	562	nm
		C12	561	564	nm
λ p of SPEC.:549~561nm					

Chip	G3				
Dom . Wavelength		Range			
Of Group		Bin	Min.	Max.	Unit
A	B	C11	559	562	nm
		C12	561	564	nm
		C13	563	566	nm
		C14	565	568	nm
		C15	567	570	nm
λ p of SPEC.:554~566nm					

Chip	G5				
Dom . Wavelength		Range			
Of Group		Bin	Min.	Max.	Unit
A	B	C15	567	570	nm
		C16	569	572	nm
		C17	571	574	nm
		C18	573	576	nm
F		CC1	569.5	571.0	nm
		CC2	570.0	572.5	nm
		CC3	571.5	574.0	nm
λ p of SPEC.:564~576nm					

Chip	G6				
Dom . Wavelength		Range			
Of Group		Bin	Min.	Max.	Unit
A	B	C16	569	572	nm
		C17	571	574	nm
		C18	573	576	nm
		C19	575	578	nm
F		CC2	569.0	572.5	nm
		CC3	571.5	574.0	nm
		CC4	572.0	575.5	nm
λ p of SPEC.:569~581nm					

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.

Descriptions

- The 19-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.



Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.




Device Selection Guide

Part No.	Chip		Lens Color
	Material	Emitted Color	
19-21/G2C		Pure Green	Water Clear
19-21/G3C	GaP	Pale Green	
19-21/G5C		Yellow Green	
19-21/G6C		AlGaInP	
19-21/GLC	InGaN	Bluish Green	
19-21/GHC	InGaN	Brilliant Green	
19-21/GPC *2	AlGaInP	Pale Green	



*1. The series is included 19-21/G2C,19-21/G3C,19-21/G5C, 19-21/G6C,19-21/GLC,19-21/GHC,and 19-21/GPC.

*2. Preliminary product.

Package Outline Dimensions

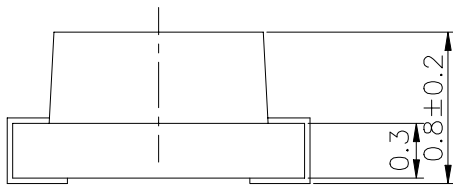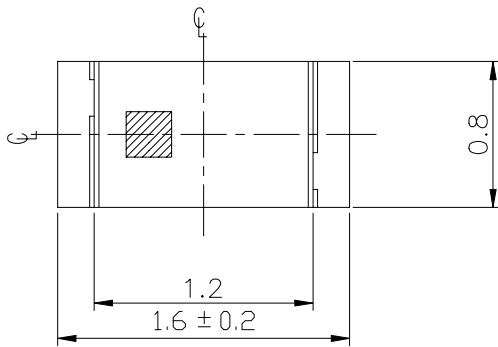

For reflow soldering

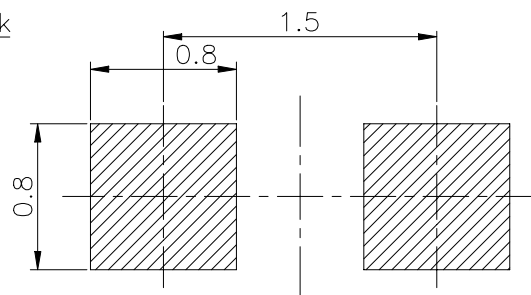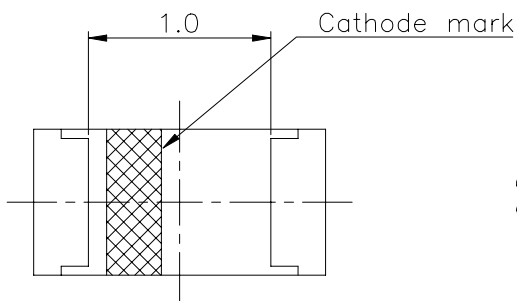

Notes: Tolerances Unless Dimension $\pm 0.1\text{mm}$, Angle $\pm 0.5^\circ$,Unit = mm

Absolute Maximum Ratings (Ta=25°C)

Series	Parameter	Symbol	Rating	Unit
19-21/G_C Series	Reverse Voltage	V _R	5	V
19-21/G_C Series	Forward Current	I _F	30	mA
19-21/ G6C/GLC/GHC/GPC			25	
19-21/G_C Series	Operating Temperature	T _{opr}	-40 ~ +85	°C
19-21/G_C Series	Storage Temperature	T _{stg}	-40 ~ +90	°C
19-21/G_C Series	Soldering Temperature	T _{sol}	260 (for 5 second)	°C
19-21/G_C Series	Electrostatic Discharge	ESD	2000	V
19-21/GLC/GHC			150	
19-21/G_C Series	Power Dissipation	P _d	130	mW
19-21/ G2C/G3C/G5C			100	
19-21/G6C/GPC			60	
19-21/G_C Series	Peak Forward Current (Duty 1/10 @1KHz)	I _F	160	mA
19-21/GLC/GHC			100	

Electro-Optical Characteristics (Ta=25°C)

Part No.	Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
19-21/G2C	Peak Wavelength	λ_p	----	555	----	nm	If=20mA
19-21/G3C				560			
19-21/G5C				570			
19-21/G6C				575			
19-21/GLC				502			
19-21/GHC				518			
19-21/GPC				561			
19-21/G2C				Dominant Wavelength			
19-21/G3C	565						
19-21/G5C	571						
19-21/G6C	573						
19-21/GLC	505						
19-21/GHC	525						
19-21/GPC	562						

Electro-Optical Characteristics (Ta=25°C)

Part No.	Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
19-21/G2C	Spectrum Radiation Bandwidth	$\Delta \lambda$	----	30	----	nm	IF=20mA
19-21/G3C				30			
19-21/G5C				30			
19-21/G6C				20			
19-21/GLC				30			
19-21/GHC				36			
19-21/GPC				20			
19-21/G_C Series	Viewing Angle	$2\theta 1/2$	----	100	----	deg	
19-21/G_C Series	Forward Voltage	VF	----	2.0	2.4	V	
19-21/GLC/GHC				3.5	4.3		
19-21/G_C Series	Reverse Current	IR	----	----	10	μA	VR=5V
19-21/ GLC/GHC/GPC					50		

■19-21/G__C Series Explain Of Luminous Intensity:

IF=20mA

Part No.	Parameter	Symbol	Typ.	Bin Code	Min.	Max.	Unit
19-21/G2C-G0J0	Luminous Intensity	Iv	2.7	G0	1.8	2.8	mcd
				H0	2.8	4.5	
				J0	4.5	7.2	
19-21/G3C-J0L1	Luminous Intensity	Iv	7.0	J0	4.5	7.2	mcd
				K0	7.2	11.5	
				L1	11.5	14.5	
19-21/G5C-K0L2	Luminous Intensity	Iv	11	K0	7.2	11.5	mcd
				L1	11.5	14.5	
				L2	14.5	18.0	
19-21/G5C-L1M1	Luminous Intensity	Iv	16	L1	11.5	14.5	mcd
				L2	14.5	18.0	
				M1	18.0	22.5	

Note:

The luminous intensity data did not including $\pm 15\%$ testing tolerance.

■ 19-21/G__C Series Explain Of Luminous Intensity:







I_F=20mA

Part No.	Parameter	Symbol	Typ.	Bin Code	Min.	Max.	Unit
19-21/G6C-L2M2	Luminous Intensity	I _v	21	L2	14.5	18.0	mcd
				M1	18.0	22.5	
				M2	22.5	28.5	
19-21/G6C-M2N2	Luminous Intensity	I _v	32	M2	22.5	28.5	mcd
				N1	28.5	36.0	
				N2	36.0	45.0	
19-21/G6C-N1P1	Luminous Intensity	I _v	42	N1	28.5	36.0	mcd
				N2	36.0	45.0	
				P1	45.0	57.0	
19-21/GLC-Q1R1	Luminous Intensity	I _v	110	Q1	72.0	90.0	mcd
				Q2	90.0	112	
				R1	112	140	
19-21/GHC-R1S1	Luminous Intensity	I _v	160	R1	112	140	mcd
				R2	140	180	
				S1	180	225	
19-21/GPC-K0L2	Luminous Intensity	I _v	12	K0	7.2	11.5	mcd
				L1	11.5	14.5	
				L2	14.5	18.0	


Note:

The luminous intensity data did not including $\pm 15\%$ testing tolerance.


Typical Electro-Optical Characteristics Curves

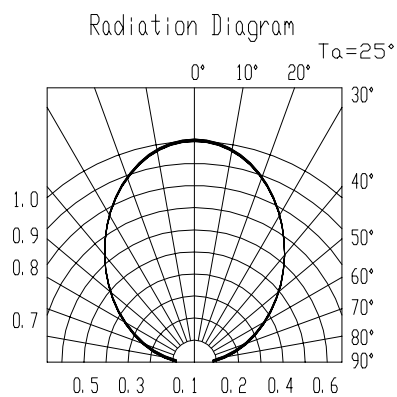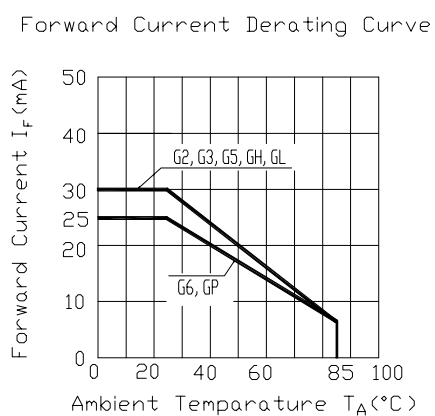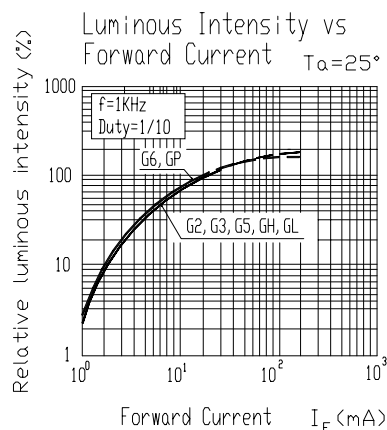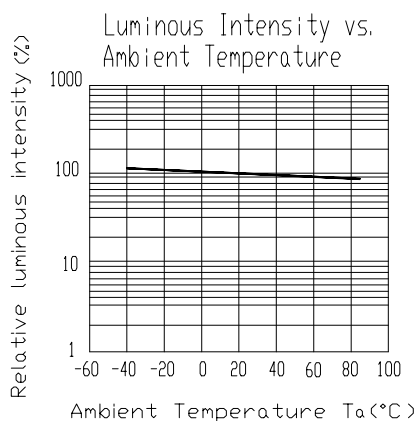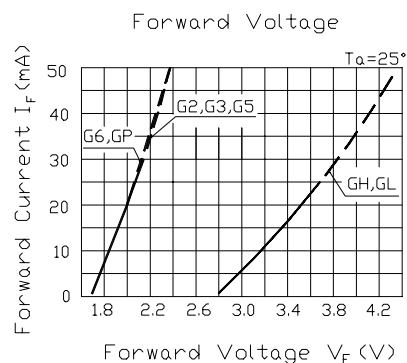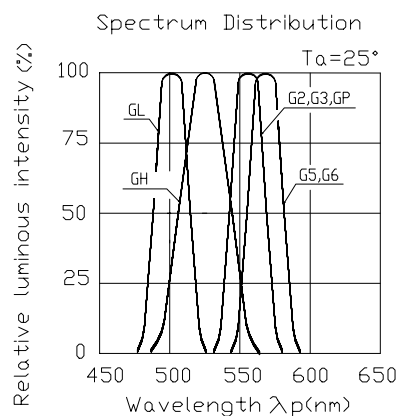

Reel & Carrier Tape Dimensions

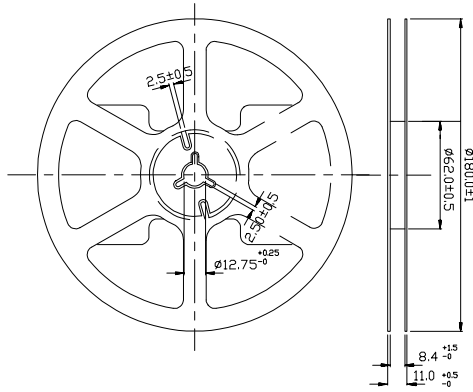

Loaded quantity per reel 3000 PCS/reel

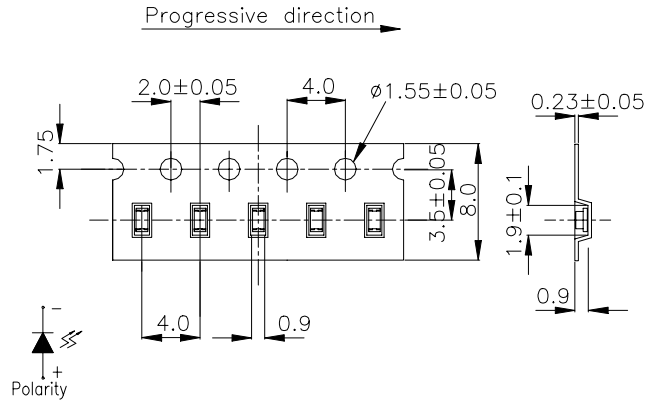

UNIT:mm

Notes: Tolerances Unless Dimension $\pm 0.1\text{mm}$, Angle $\pm 0.5^\circ$,Unit = mm

Label explanation

CAT: Luminous Intensity (mcd)

HUE: Dom. Wavelength (nm)

REF: Forward Voltage (V)

EVERLIGHT

CPN :
P/N: XXXXXXXXXXXX



XX-XXXXXXXX

QTY: XXXX



LOT NO: XXXXXXXXXXX



CAT:
HUE:
REF:

MADE IN TAIWAN

Iv λd VF

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90 %

LTPD : 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Rc
1	Reflow	Temp. : 240°C ± 5°C Min. 5 sec.	5 Sec.	22 Pcs.	0/1
2	Temperature Cycle	H : +85°C 30 min. ∫ 5 min. L : -55°C 30 min.	50 Cycles	22 Pcs.	0/1
3	Thermal Shock	H : +100°C 5 min. ∫ 10 sec. L : -10°C 5 min.	50 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -55°C	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	I _F = 20 mA	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C/RH 85%	1000 Hrs.	22 Pcs.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage time


2.1 The operation of Temperature and RH are : 5°C~35°C , RH60%.

2.2 Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp proof box with descanting agent. Considering the tape life , we suggest our customers to use our products within a year(from production date).


2.3 If opened more than one week in an atmosphere 5°C~35°C , RH 60%, they should be treated at 60°C± 5°C for 15hrs.

2.4 When you discover that the desiccant in the package has a pink color (Normal = blue) , you should treat them in the same conditions as 2.3.

Soldering heat

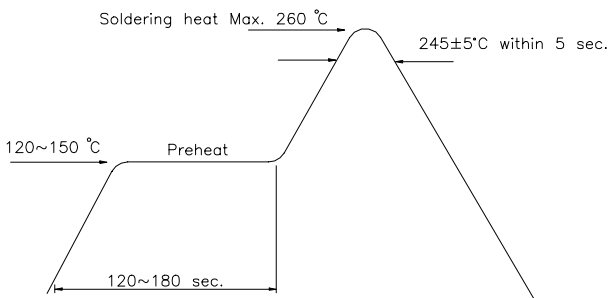

Reflow Temp / Time

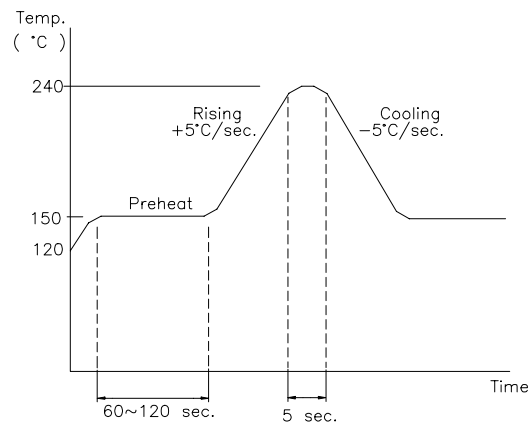

Soldering Iron

Basic spec is ≤5 sec when 260°C. If temperature is higher, time should be shorter (+10°C → -1sec). Power dissipation of Iron should be smaller than 15 W , and temperature should be controllable. Surface temperature of the device should be under 230 °C .

Rework

1. Customer must finish rework within 5 sec under 245°C.
2. The head of iron can not touch copper foil.
3. Twin-head type is preferred.

