

EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-033-856 REV: 1.0

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1SURSYGC/S530-A2 ECN : _____ Page: 1/5

Features :

- Two chips are matched for uniform light output.
- Long life-solid state reliability
- IC compatible/Low power consuming


Descriptions :

- The 339-1 LED lamps contain two integral chips and is available as both bicolor and bi color types.
- The Hyper Red and Super Yellow Green Light is emitted by diodes of AlGaInP and AlGaInP respectively.

Applications :

- TV set
- Monitor
- Telephone
- Computer

Package Dimensions:

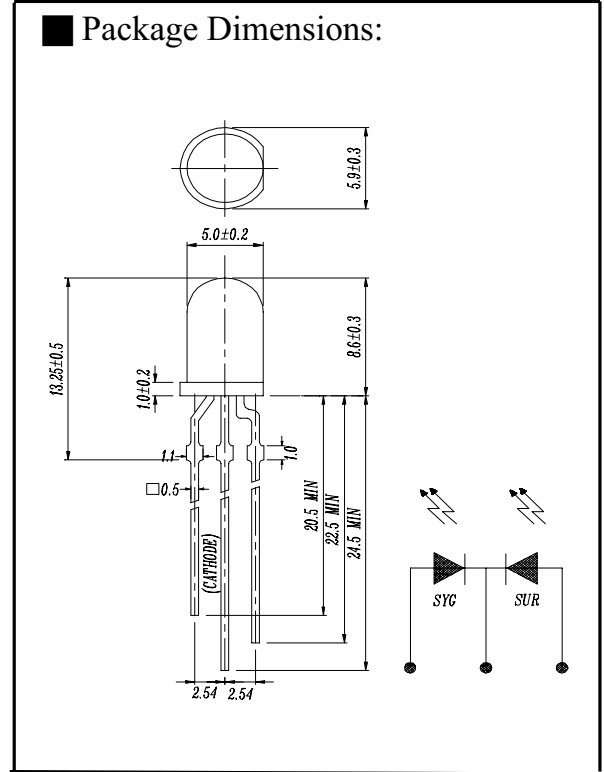

Notes :

- 1.All dimensions are millimeters.
- 2.An epoxy meniscus may extend about 1.5mm(0.059") down the lead.

PART NO	Chip		Lens Color
	Material	Emitted Color	
339-1SURSYGC/S530-A2	AlGaInP	Hyper Red	Water Clear
	AlGaInP	Super Yellow Green	

B89061602,8906145

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>

EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-033-856 REV: 1.0

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1SURYGC/S530-A2 ECN : _____ Page: 2/5

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	IF	SUR 25	mA
		SYG 25	
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	SUR 60	mW
		SYG 60	
Peak Forward Current (Duty 1/10 @ 1KHZ)	IF	SUR 160	mA
		SYG 160	
Reverse Voltage	VR	5	V

Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	SUR 160	250	/	mcd	IF= 20 mA
	SYG	160	250	/		
Viewing Angle	2θ 1/2	/	25	/	deg	IF= 20 mA
Peak Wavelength	λp	SUR /	632	/	nm	IF= 20 mA
	SYG	/	575	/		
Dominant Wavelength	λd	SUR /	624	/	nm	IF= 20 mA
	SYG	/	573	/		
Spectrum Radiation Bandwidth	△λ	SUR /	20	/	nm	IF= 20 mA
	SYG	/	20	/		
Forward Voltage	VF	SUR /	2.0	2.4	V	IF= 20 mA
	SYG	/	2.0	2.4		
Reverse Current	IR	/	/	10	μ A	VR= 5 V

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4







MODEL NO : 339-1SURSYGC/S530-A2

ECN : _____

Page: 3/5

Typical Electro-Optical Characteristic Curves

SUR

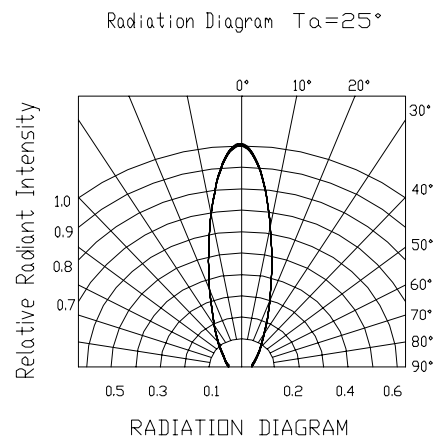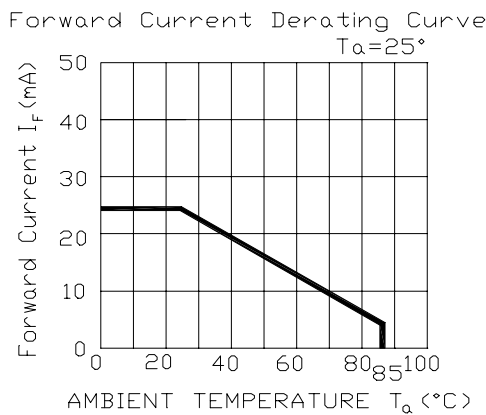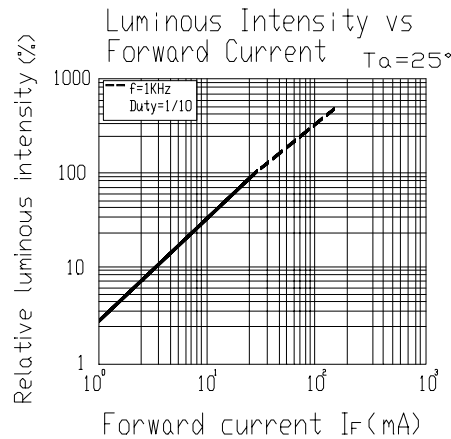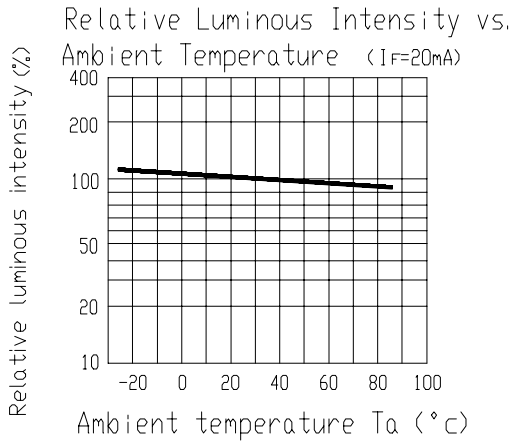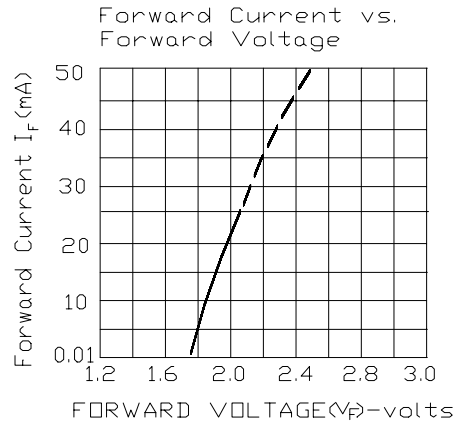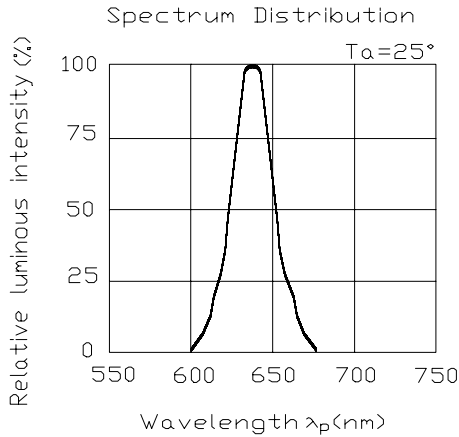

EVERLIGHT ELECTRONICS CO.,LTD.







Device Number : DLE-033-856 REV: 1.0

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1SURSYGC/S530-A2 ECN : _____ Page: 4/5

■ Typical Electro-Optical Characteristic Curves

SYG

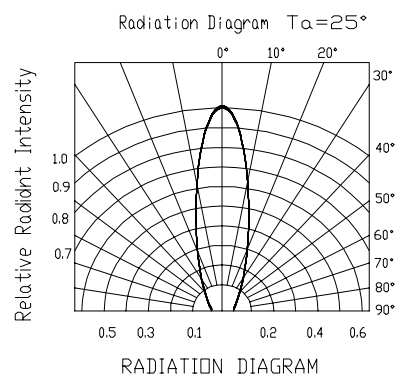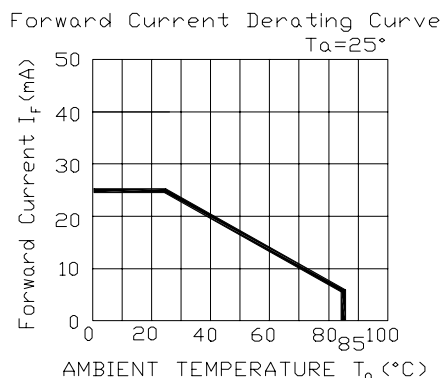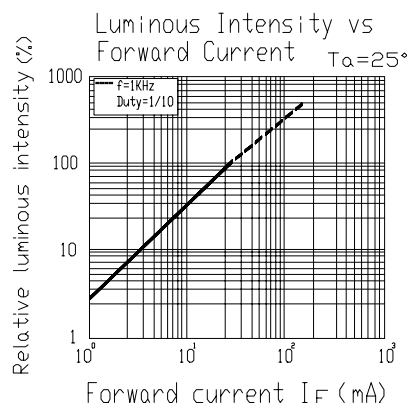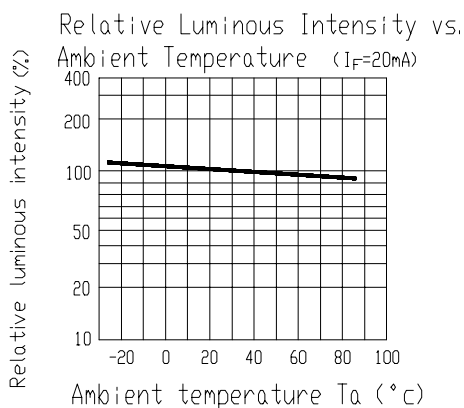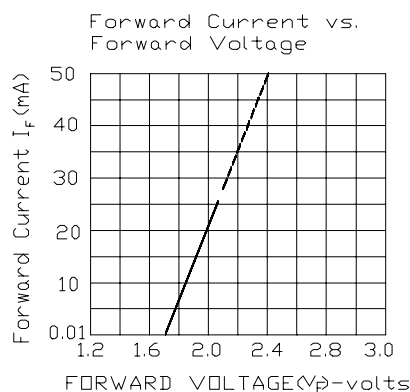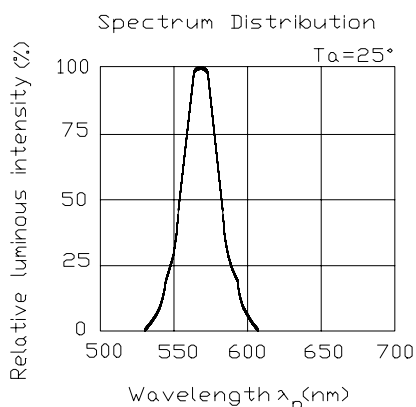

EVERLIGHT ELECTRONICS CO.,LTD.Device Number : DLE-033-856 REV: 1.0

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1SURSYGC/S530-A2 ECN : _____ Page: 5/5**■ Reliability test items and conditions**

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1